


### Specifications

Current Rating: 3.0 Ampere  
 Insulation Resistance: 1000MΩ Min  
 Dielectric Withstanding: 600V AC  
 Contact Resistance: 20mΩ Max  
 Operating Temperature: -40°C to +105°C



### Materials

Contact Material: Phosphor Bronze  
 Insulation Material: High Temperature Thermoplastic, UL 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection

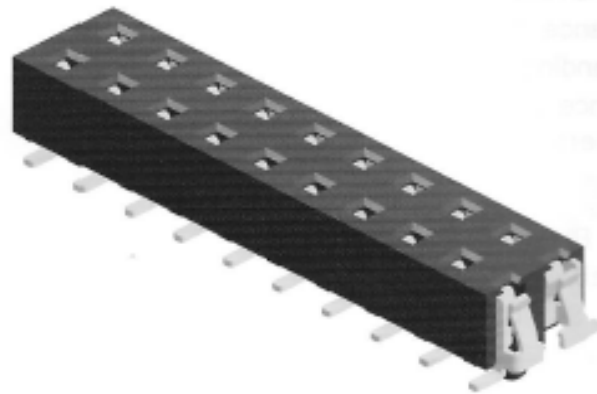

Mating with

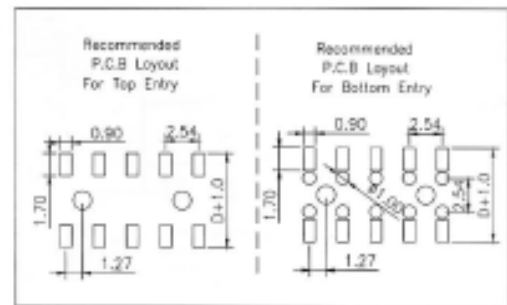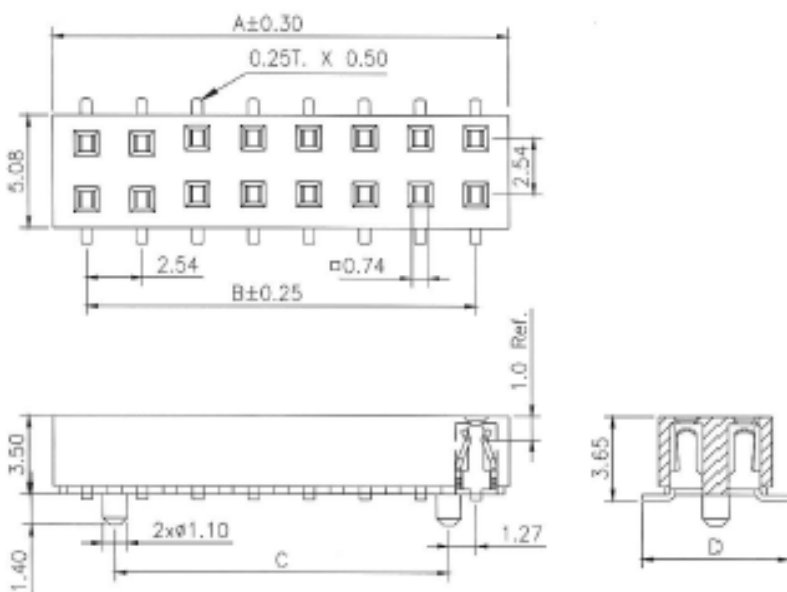

PS: Suggested Mating Pin Length: 2.5-3.0mm

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	5.58	2.54	-	12	30.98	27.94	25.40	22	56.38	53.34	50.80	32	81.78	78.74	76.20
03	8.12	5.08	2.54	13	33.52	30.48	27.94	23	58.92	55.88	53.34	33	84.32	81.28	78.74
04	10.66	7.62	5.08	14	36.06	33.02	30.48	24	61.46	58.42	55.88	34	86.86	83.82	81.28
05	13.20	10.16	7.62	15	38.60	35.56	33.02	25	64.00	60.96	58.42	35	89.40	86.36	83.82
06	15.74	12.70	10.16	16	41.14	38.10	35.56	26	66.54	63.50	60.96	36	91.94	88.90	86.36
07	18.28	15.24	12.70	17	43.68	40.64	38.10	27	69.08	66.04	63.50	37	94.48	91.44	88.90
08	20.82	17.78	15.24	18	46.22	43.18	40.64	28	71.62	68.58	66.04	38	97.02	93.98	91.44
09	23.36	20.32	17.78	19	48.76	45.72	43.18	29	74.16	71.12	68.58	39	99.56	96.52	93.98
10	25.90	22.86	20.32	20	51.30	48.26	45.72	30	76.70	73.66	71.12	40	102.10	99.06	96.52
11	28.44	25.40	22.86	21	53.84	50.80	48.26	31	79.24	76.20	73.66				

\*For Coded Dimension Not Inside The Table, Please Refer To \* ORDERING INFORMATION \*

## Ordering Information

CSHC211 -	XX	XX	X	XXX	B1AC
No. of Pins per Row	Standard Plating	A	:w / o post	Pin Length ( D )	
02-40	02 :Gold Flash	B	:with post	A 001 : D=6.60	
	Selective Plating			B 001 : D=6.60	
	01 :Tin			For Special Length Requirement	
	05 :Gold Flash / Tin			Please Contact Our Sales Personnel	